



PA *HEXA C®
Synchronized
Press Brake*






Fast | Flexible | Accurate | Sustainable PA 13530 HEXA C®

Model (version 4.3.1)		PA 13530	PA 13540	PA 16030	PA 16040	PA 22030	PA 22040
Capacity	kN	1350	1350	1600	1600	2200	2200
Max. working length	mm	3050	4000	3050	4000	3050	4000
Distance between housings	mm	2550	3150	2550	3150	2550	3150
Max. stroke	mm	260	260	260	260	260	260
Max. open height without tools	mm	500	500	500	500	500	500
Throat depth	mm	400	400	400	400	400	400
Motor power	kW	15	15	15	15	15	15
Approach speed	mm/s	150	150	150	150	130	130
Working speed	mm/s	10	10	10	10	8	8
Return speed	mm/s	150	150	150	150	120	120
Stroke of axis X	mm	625	625	625	625	625	625
Speed of axis X	mm/s	800	800	800	800	800	800
Stroke of axis R	mm	200	200	200	200	200	200
Speed of axis R	mm/s	200	200	200	200	200	200
Stroke of axes Z - Z1 / Z2	mm	90 to 2150	90 to 2750	90 to 2150	90 to 2750	90 to 2150	90 to 2750
Speed of axes Z - Z1 / Z2	mm/s	1200	1200	1200	1200	1200	1200
Stroke of axis X1	mm	± 100	± 100	± 100	± 100	± 100	± 100
Speed of axis X1	mm/s	100	100	100	100	100	100
Length	mm	4080	5080	4080	5080	4100	5100
Width	mm	1840	1940	1840	1940	1970	2020
Height	mm	2960	3120	2960	3120	3120	3120
Transportation height	mm	2730	2890	2730	2890	2890	2890
Weight	Kg	7500	10900	7700	11100	9100	12250

All data are approximate. Specifications are subject to changes without notice. Shown specifications may vary from country to country. For different configurations consult your Adira specialist.

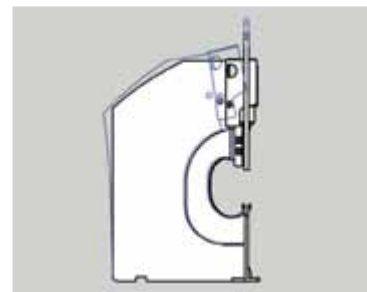

DC/MAP-C-160-I-16/10

